


General Aluminum Flagpole Installation Instructions.

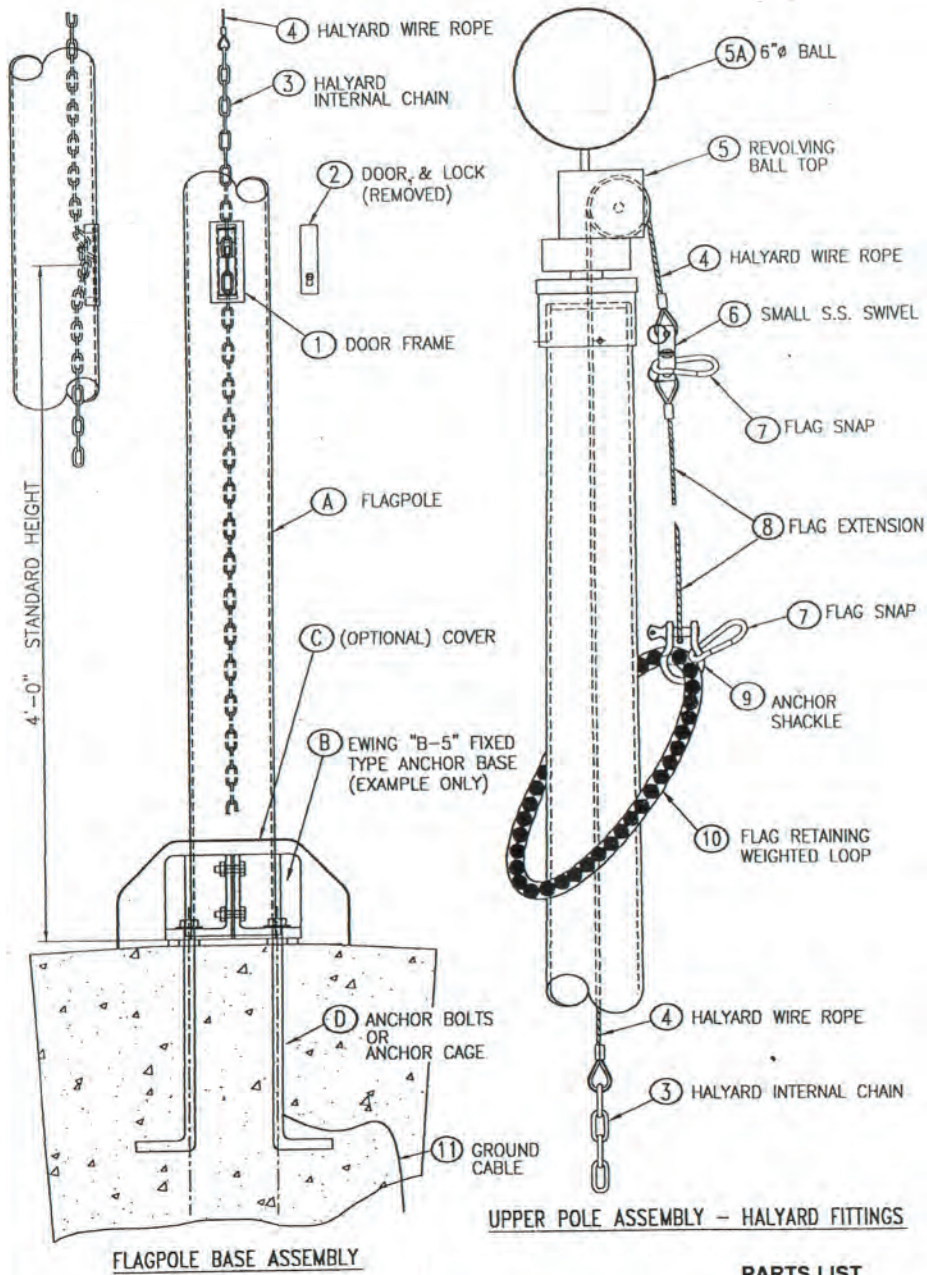

PARTS LIST

No	DESCRIPTION	No	DESCRIPTION
1.	CAST ALUMINUM DOOR & FRAME	6.	STAINLESS STEEL SWIVEL ASSEMBLY
2.	DOOR & LOCK ASSEMBLY WITH KEY	7.	PLATED STEEL FLAG SNAP
3.	HALYARD INTERNAL CHAIN	8.	FLAG EXTENSION
4.	HALYARD WIRE ROPE	9.	ANCHOR SHACKLE
5.	REVOLVING BALL TOP ASSEMBLY	10.	FLAG RETAINING LOOP
5A	OPTIONAL BALL TOP	11.	GROUND CABLE

General Aluminum Flagpole Installation Instructions.

1. Place base cover over top of flagpole while pole is in a horizontal position and slide base cover to about three feet from the bottom of the pole.
2. Slide retaining loop and flag extension over the top of the flagpole.
3. Through the frame door opening, slide an electrician's fish or a length of stiff wire to the top of the pole.
4. Attach the last link of the chain to the fish or wire and PULL DOWN through the frame door opening.
5. Attach the revolving ball top assembly onto the top of the pole. (three set screws)
6. Attach the flag extension assembly to wire rope end and check that all connections are tight and secure.
7. Enjoy your flagpole and thank you for purchasing from Aurora Flags and Banners INC.

FOUNDATION DIMENSIONS

POLE HEIGHT	ARCHITECTURAL	COMMERCIAL
16'-0"	16" DIA X 48" DEEP	16" DIA X 48" DEEP
20'-0"	20" DIA X 48" DEEP	18" DIA X 48" DEEP
25'-0"	24" DIA X 48" DEEP	20" DIA X 48" DEEP
30'-0"	24" DIA X 54" DEEP	20" DIA X 54" DEEP
35'-0"	30" DIA X 54" DEEP	24" DIA X 54" DEEP
40'-0"	30" DIA X 60" DEEP	28" DIA X 60" DEEP
50'-0"	34" DIA X 70" DEEP	32" DIA X 70" DEEP
60'-0"	36" DIA X 74" DEEP	34" DIA X 74" DEEP

Above recommended minimum concrete foundation dimensions are for good, firm, dry soil conditions only. Dig foundation hole accordingly and allow an extra few inches in depth for a shallow gravel footing.

The above install instructions are for minimum concrete foundation dimensions. Aurora Flags and banners inc is **not responsible** for installation of the flagpole or the concrete foundation.